




Copper Structured Cabling

Category 5e F/UTP LAN Cable

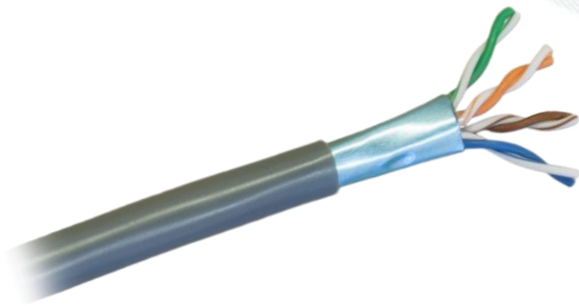

Linxcom Foiled Twisted Pair (FTP) Category 5e (CAT5-Enhanced) copper cable is a 24 American Wire Gauge (AWG) used ideally for Gigabit Ethernet, Multimedia, voice and data.

Our cables are verified by EC and third party organization and comply with ISO11801. All outer jackets can be PVC or LSZH upon customers' requests.

Features & Benefits

- UL Certified
- 4 pairs twisted pair cable
- Application: Broadband Video, Fast Ethernet
- All cables meet or exceed the requirement proposed by TIA /EIA 568 B .2 ,ISO/IEC 11801 Category 5e
- 24AWG insulated copper conducts with PVC jacket
- Twisted pairs are brightly coloured and distinguished at a glance
- the cross frameworks are stripped to match corresponding colour pairs
- Ultra smooth jacket makes this cable easy to pull in tight spaces
- 305 metres packaged in full boxes or 500m reels

Application

- Horizontal wiring in Local Area Networks (LAN)

Colouring

Pair 1	Pair 2	Pair 3	Pair 4
Blue, Blue/White	Orange, Orange/White	Green, Green/White	Brown, Brown/White

Construction

Conductor	Solid Bare Copper
American Wire Gauge (AWG)	24
Insulation	HDPE
Average Thickness (±0.03mm)	0.20
Minimum Point Thickness (mm)	0.18
Insulation Diameter (±0.05mm)	0.9
Twisting Lay Length (mm)	≤30
Cable Laying Length (±mm)	140
Filler	HDPE
Jacket	PVC or LSZH
Average Thickness (±0.05mm)	0.50
Minimum Point Thickness (mm)	0.40
Outer Diameter (±0.2mm)	5.20
Rip Cord	Per Request






Copper Structured Cabling

Category 5e F/UTP LAN Cable



Electrical Characteristics

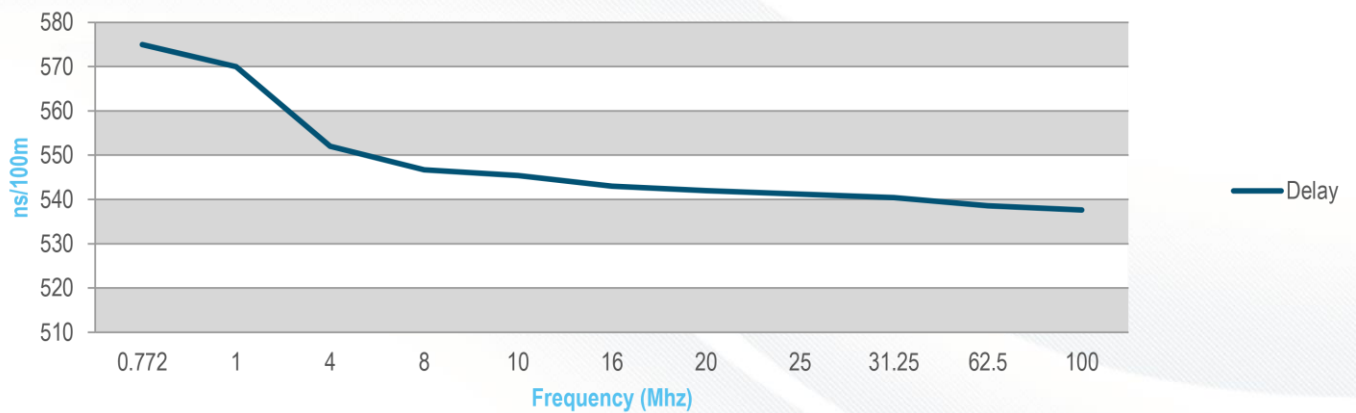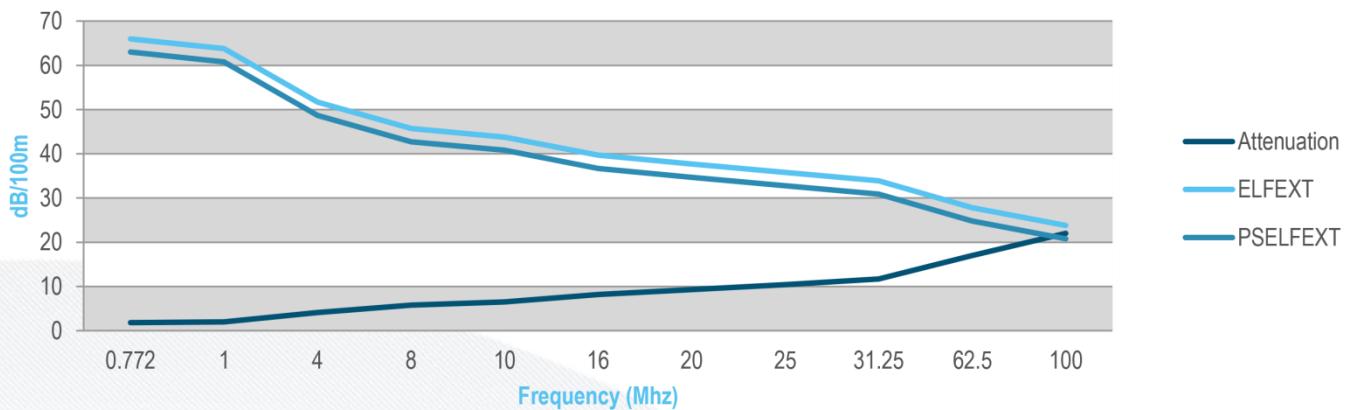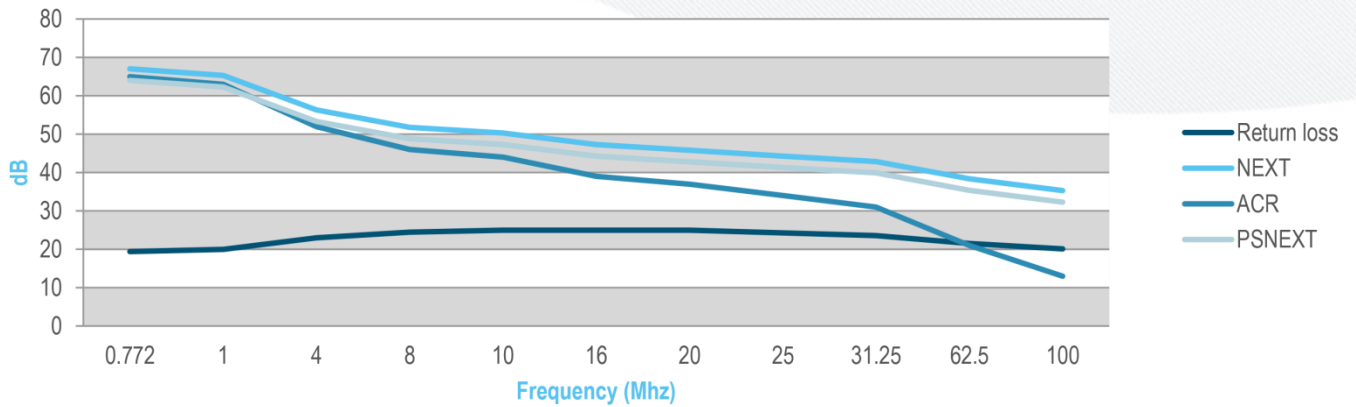



Copper Structured Cabling

Category 5e F/UTP LAN Cable



Frequency (MHz)	Return loss (dB)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB)
0.772	19.4	1.8	67.0	65
1	20.0	2.0	65.3	63
4	23.0	4.1	56.3	52
8	24.5	5.8	51.8	46
10	25.0	6.5	50.3	44
16	25.0	8.2	47.3	39
20	25.0	9.3	45.8	37
25	24.3	10.4	44.3	34
31.25	23.6	11.7	42.9	31
62.5	21.5	17.0	38.4	21
100	20.1	22.0	35.3	13

Frequency (MHz)	PSNEXT (dB)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)	Delay (ns/100m)
0.772	64.0	66.0	63.0	575.0
1	62.3	63.8	60.8	570.0
4	53.3	51.7	48.7	552.0
8	48.8	45.7	42.7	546.7
10	47.3	43.8	40.8	545.4
16	44.3	39.7	36.7	543.0
20	42.8	37.7	34.7	542.0
25	41.3	35.8	32.8	541.2
31.25	39.9	33.9	30.9	540.4
62.5	35.4	27.8	24.8	538.6
100	32.3	23.8	20.8	537.6

1.0-100.0MHz Impedance (ohms)	100 ± 15
100.0-250MHz Delay Skew (ns/100m)	100 ± 20
1.0-250.0MHz Impedance (ohms)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20oC (ohms/km)	93.8
Resistance Unbalance (%)	<=5

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°C x hrs)	100 x 240
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2°Cx4hrs)	No crack



Copper Structured Cabling

Category 5e F/UTP LAN Cable



Ordering Information

Using the available configurations amend/create a part number using the formula below.

Construction		Jacket	
FTP (F/UTP)	FTP	PVC	PVC
		LSZH	LSZH
FTP	5E	LSZH	500
Category		Length	
Category 5e (CAT5e)	5E	305m Box	305
		500m Reel	500

Example: **FTP5ELSZH500** – Category 5e Foiled Twisted Pair LAN Cable LSZH Jacket – 500m Reel

For any queries, please contact the Linxcom team using the details below.