



Cabinets & Racks

Floor Cabinets – Model B



Linxcom 19" floor-standing cabinets and racks are a cost-effective solution that is both aesthetically pleasing and durable. Designed to be installed in data centres, equipment rooms and office environments to mount telecommunication, data communication, security, broadcasting and other electronic equipment.

Features & Benefits

- Medium duty cabinet of durable modular construction
- Various 200° swing doors available, including: glass, punched, double horizontal, double vertical
- Lockable and removable side panels
- Adjustable and lockable cable entries at the top and bottom
- U-marked frames can be removed and adjusted to requirement
- Fully customisable to requirement
- Comes complete with fan tray with fans and earthing screws
- Available in grey or black - other colours available upon request
- Tool-free changing of front and rear door orientation
- Various accessories available, including fan trays, PDUs, cable management panels and more
- Maximum 800kgs UDL loading capacity



30 Minute Assembly



2 Person Assembly



Available Flat-Packed



IP Rating Available



Available Ready-Built



800kgs UDL Capacity

Below we have our standard stock sizes for height, widths and depths, but we also offer custom-built cabinets. If you require a specification which is not specified, then contact us and we can assist you.

Available Configurations

Capacity (U)	Height (mm)	Widths (mm)	Depths (mm)	Colours
47	2220	600, 800	600, 800, 960	Black, Grey
42	2000	600, 800	600, 800, 960	Black, Grey
37	1800	600, 800	600, 800, 960	Black, Grey
32	1600	600	600, 800	Black, Grey
27	1400	600	600, 800	Black, Grey
22	1200	600	600, 800	Black, Grey




Cabinets & Racks

Floor Cabinets – Model B

Technical Specifications

Part	Material	Surface
Top Cover	SPCC Cold-Rolled Steel 1.2mm	Powder Coated/Vented Sides
Fan Tray	SPCC Cold-Rolled Steel 1.0mm	Powder Coated
Side Panel	SPCC Cold-Rolled Steel 1.2mm	Powder Coated
Rail	SPCC Cold-Rolled Steel 2.0mm	Powder Coated
Frame	SPCC Cold-Rolled Steel 1.0mm	Powder Coated
Front Door	Toughened Glass 5mm/ SPCC Cold-Rolled Steel 1.2mm	Powder Coated
Fixed Shelf	SPCC Cold-Rolled Steel 1.2mm	Powder Coated
Bottom	SPCC Cold-Rolled Steel 1.5mm	Powder Coated/Vented Sides
Rear Door	SPCC Cold-Rolled Steel 1.2mm	Powder Coated/Vented
Beam	SPCC Cold-Rolled Steel 1.2mm	Powder Coated

Technical Drawings

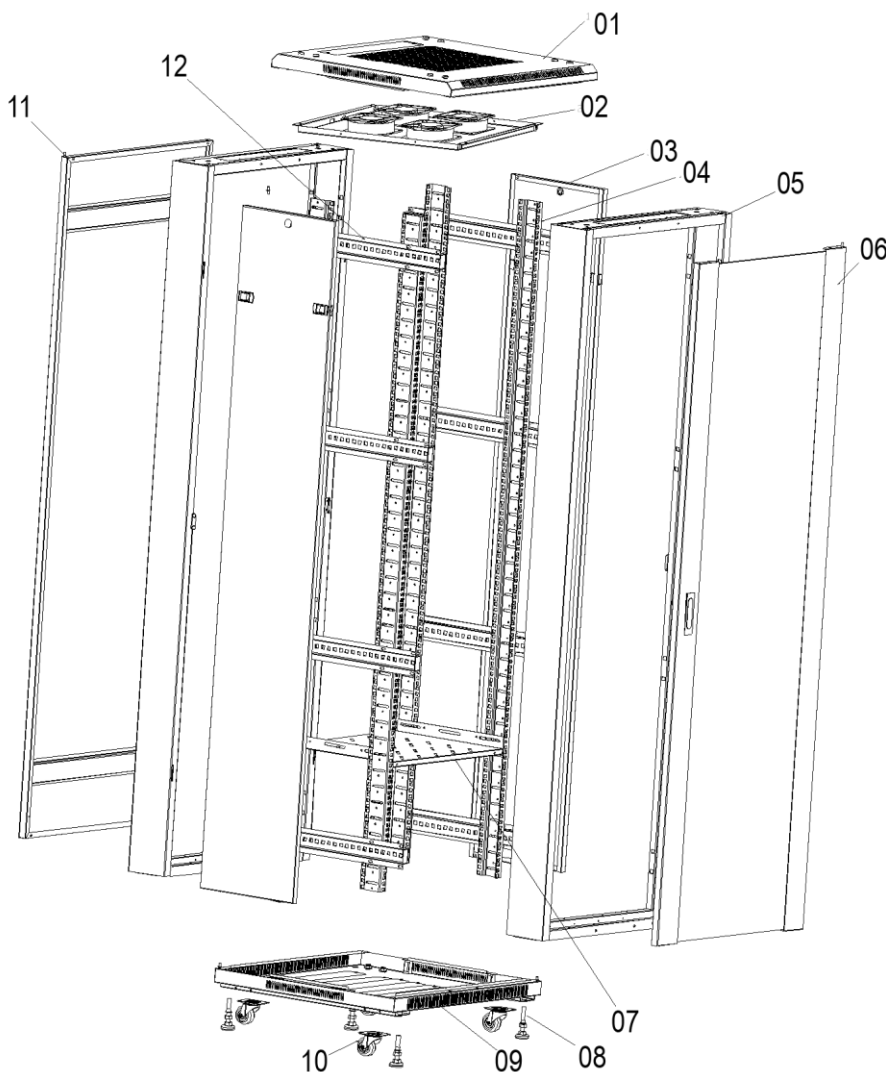


1	Top cover
2	Fan tray
3	Side panel
4	Rail
5	Frame
6	Mesh Front door
7	Fixed shelf
8	M12 feet
9	Bottom
10	Castor with break
11	Double Rear door
12	Beam




Cabinets & Racks


Floor Cabinets – Model B

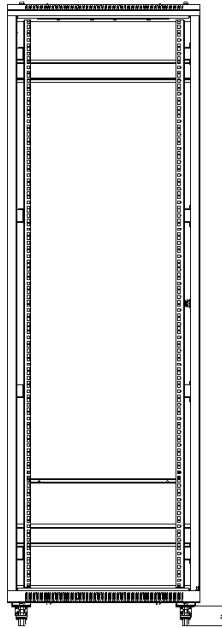


Front(Without front door)

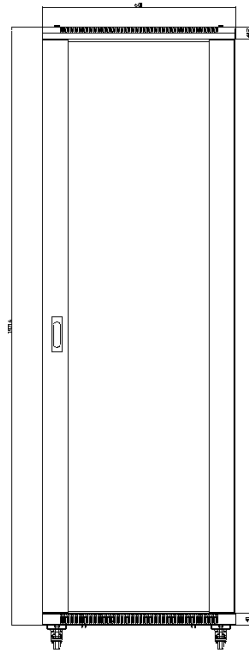

Front

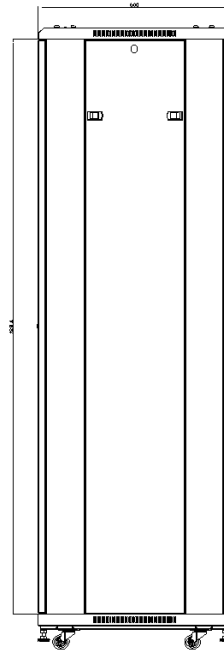

Side

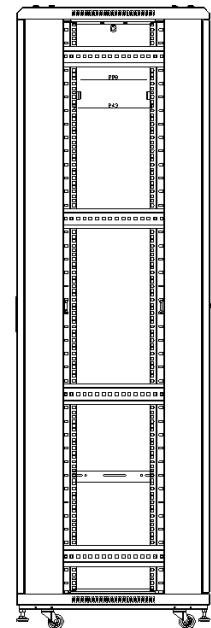

Side(Without front door)

Ordering Information

Using the available configurations amend/create product codes using the formula below.

Linxcom		Colour		Depth	
Linxcom	LXM	Black	BLK	600mm	6
		Grey	GRY	(Only for 600mm width)	8
				800mm	9
				960mm	
				(Only for 37U, 42U or 47U)	
LXM	B	BLK	8	9	47
Model		Width		U Capacity (Height)	
Model B	B	600mm	6	47U (2220mm)	47
		800mm	8	42U (2000mm)	42
		(Only for 42U or 47U)		37U (1800mm)	37
				32U (1600mm)	32
				27U (1400mm)	27
				22U (1200mm)	22

Example: **LXMBBLK8947** - Linxcom Model B 47U 800*960mm Black Floor Cabinet