Cabinets & Racks
Floor Cabinets – Model W

Linxcom 19" floor-standing cabinets and racks are a cost-effective solution that is both aesthetically pleasing and durable. Designed to be installed in data centres, equipment rooms and office environments to mount telecommunication, data communication, security, broadcasting and other electronic equipment.

Features & Benefits

- Medium duty cabinet of durable modular construction
- Various 200° swing doors available, including: glass, punched, horizontal, double vertical
- Lockable and removable side panels
- Adjustable/lockable cable entries at the top and bottom
- U-marked frames can be removed and adjusted to requirement
- Fully customisable to requirement
- Comes complete with fan tray, fans and earthing screws
- Available in grey or black - more colours also available
- Tool-free changing of front and rear door orientation
- Various accessories available, including fan trays, PDUs, cable management panels and more
- Maximum 800kgs UDL loading capacity

30 Minute Assembly · 2 Person Assembly · Available Flat-Packed

Available Ready-Built · 800kgs UDL Capacity

Below we have our standard stock sizes for height, widths and depths, but we also offer custom-built cabinets. If you require a specification which is not specified, then contact us and we can assist you.

Technical Specifications

Capacity (U)	Height (mm)	Widths (mm)	Depths (mm)	Colours
47	2220	600, 800	600, 800, 960	Black, Grey
42	2000	600, 800	600, 800, 960	Black, Grey
37	1800	600, 800	600, 800, 960	Black, Grey
32	1600	600	600, 800	Black, Grey
27	1400	600	600, 800	Black, Grey
22	1200	600	600, 800	Black, Grey

Cabinets & Racks
Floor Cabinets – Model W

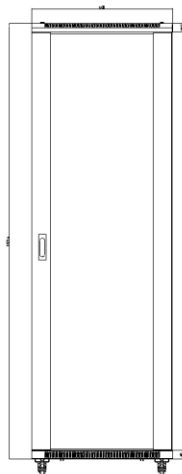| Part	Material	Surface
Top Cover	SPCC Cold-Rolled Steel 1.2mm	Powder Coated/Vented Sides
Fan Tray	SPCC Cold-Rolled Steel 1.0mm	Powder Coated
Side Panel	SPCC Cold-Rolled Steel 1.2mm	Powder Coated
Rail	SPCC Cold-Rolled Steel 2.0mm	Powder Coated
Frame	SPCC Cold-Rolled Steel 1.5mm	Powder Coated
Mounting Angle	SPCC Cold-Rolled Steel 2.0mm	Plated White Zinc
Front Door	SPCC Cold-Rolled Steel 1.5mm	Powder Coated/Punched
Fixed Shelf	SPCC Cold-Rolled Steel 1.2mm	Powder Coated
Bottom	SPCC Cold-Rolled Steel 1.2mm	Powder Coated/Vented Sides
Rear Door	SPCC Cold-Rolled Steel 1.2mm	Powder Coated/Vented Sides
Beam	SPCC Cold-Rolled Steel 1.2mm	Powder Coated

Technical Drawings
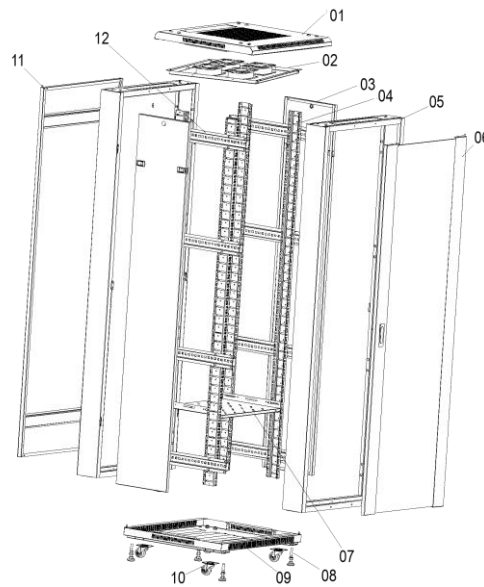
1	Top cover
2	Fan tray
3	Side panel
4	Rail
5	Frame
6	Mesh Front door
7	Fixed shelf
8	M12 feet
9	Bottom
10	Castor with break
11	Double Rear door
12	Beam
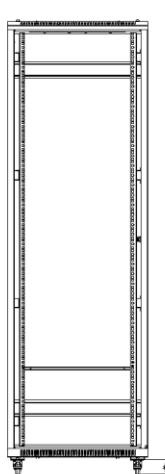
Front(Without front door)   Front   Side   Side(Without front door)
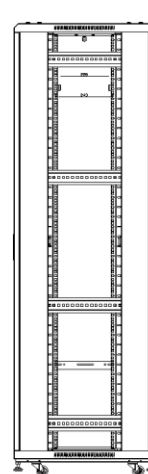
Networking & Telecommunications End-to End Solutions
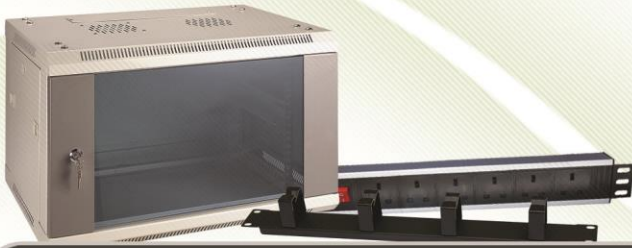
Ordering Information

Using the available configurations amend/create product codes using the formula below.

Linxcom		Colour		Depth	
Linxcom **LXM**		Black **BLK** Grey **GRY**		600mm **6** *(Only for 600mm width)* 800mm **8** 960mm **9** *(Only for 37U, 42U or 47U)*	
LXM	**W**	**BLK**	**6**	**6**	**42**

Model		Width		U Capacity (Height)	
Model W **W**		600mm **6** 800mm **8** *(Only for 42U or 47U)*		47U (2220mm) **47** 42U (2000mm) **42** 37U (1800mm) **37** 32U (1600mm) **32** 27U (1400mm) **27** 22U (1200mm) **22**	

Example: **LXMWBLK6642** - Linxcom Model W 42U 600*600mm Black Floor Cabinet

For any queries, please contact the Linxcom team using the details below.