


Rangee VP255P

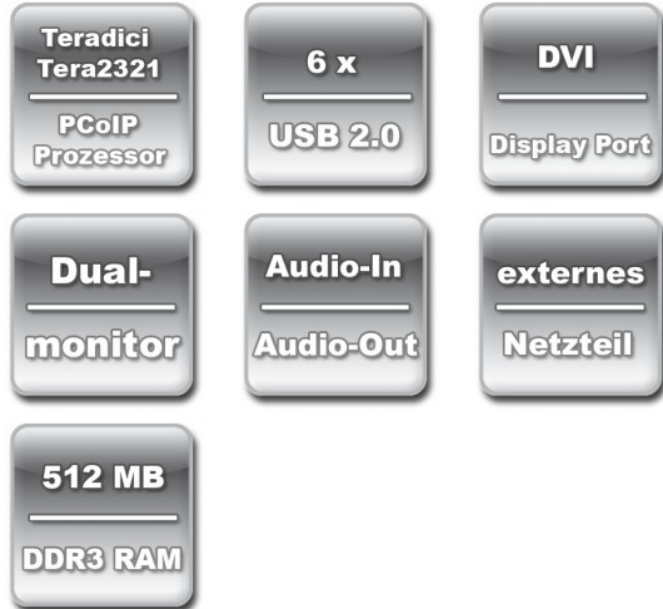

Rangee PCoIP Zero Client VP255P

Rangee Zero Client Z-VP255P-VDI is the ideal solution for Virtual-Desktop-Infrastructure using PCoIP technology. The processor used in this device is Teradici Tera2321 PCoIP Prozessor, to deliver outstanding video performance for best user experience.

With one DP and DVI video output can run two displays with up to 1920x1080. Single Monitor resolution up to 2650 x 1600 is available on DP output.

Three different models

	Processor	RAM	Flash/DOM Memory	Operating System	Equipment	Price
Z-VP255P-VDI	Teradici Ter 2321 PCoIP	512 MB DDR3	-	-	RJ45, external power adapter	on request
Z-VP255SFP-VDI	Teradici Ter 2321 PCoIP	512 MB DDR3	-	-	SFP-modul, external power adapter	on request

Technical specifications

System

Processor	Teradici Tera2321 PCoIP CPU
RAM	512 MB DDR3
Flash/DOM Memory	-

Graphic

Max. Resolution	Up to 1920 x 1200, up to 2560 x 1600 (Single Monitor via DP)
Video Memory	-
Graphic Ports	1 x DVI-D, 1 x DP
Dual-Monitor	Yes (over DVI-D and DP)

Audio

Ports	1 x Audio-In, 1 x Audio-Out
-------	-----------------------------

Interfaces

USB 2.0	6 x USB (4 x front, 2 x back)
PS/2	-
Serial / Parallel	-

Network

Ethernet	1 x 10/100/1000 Mbit LAN RJ-45 Ethernet (VP250P/VP250POE) - SFP module slot (VP250SFP)
Wireless LAN	-

Data

Size (BxHxD)	30 x 170 x 132 mm
Weight	0,62 kg
Cooling	Fanless
Temperature	5°C to 40°C

Power Supply

Power Adapter	External power adapter (VP250POE: power supply over RJ45, no power adapter included)
Power Input	12V / 3A, 9 Watt

Configuration

Warranty	3 years, extendable up to 5 years
VESA Halterung	-
Remote Management	-
Operating System	-

equipment

22920010	Vesa Mount for VP250P/ VP250POE	Vesa Mount Vesa 100/100	23,00 € excl. VAT
			27,37 € incl. VAT

Rangee GmbH
Gut-Dämme-Straße 11
52070 Aachen/Germany

Tel: +49 (0)241-997 28 50
Fax: +49 (0)241-997 28 59
Email: info@rangee.com



DE 743 133 53

Änderungen und Irrtümer vorbehalten. Rangee GmbH, 02/2017



Front Side



Back Side



Left Profile